



BOILER AND FURNACE THERMOCOUPLE WITH EXPANSION LOOP MACHINED TIP TS53 – TYPE WI

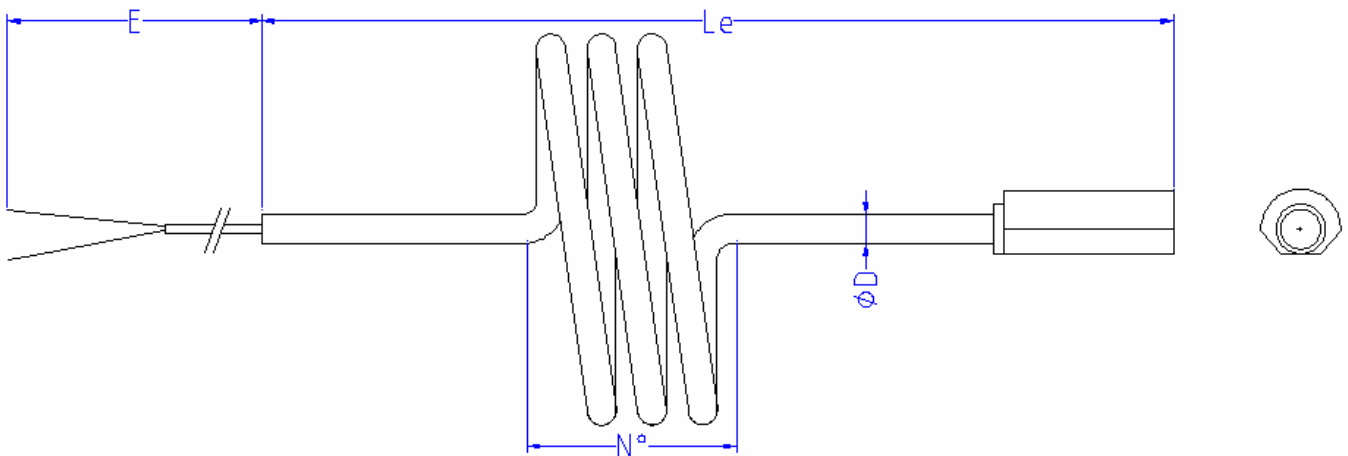

FEATURES	TECHNICAL SPECIFICATIONS	
<p>High quality thermocouple element with MgO mineral insulated metal sheathed cable, providing excellent stability and reproducibility. The correct choice of sheath material will strongly influence the stability and the life time of the thermocouples.</p> <p>The unique properties make this basic element ideally suited for a wide variety of applications up to 1200°C depending on thermocouple type and metal sheath.</p> <p>The thermocouple element is fully bendable.</p>	<ul style="list-style-type: none"> Max. temperature depending on thermocouple type and metal sheath Minimum R_{ins} : 1000 MΩ at 500 VDC, ambient Standard accuracy IEC 584 class 1 Connection wire: ANSI / IEC / DIN With special tip for welding on process pipes 	
	<p>Thermocouple types</p> <p style="text-align: center;">K / N</p> <p>According to IEC 584</p>	<div style="text-align: center;"> <p>II 1 G EEX ia IIC T6..T1 KEMA 02ATEX1251 X ATEX directive 94/9/EC</p> </div>

ORDERING INFORMATION

TC	K		K		K		K		N		N		
	NiCr – NiAl		NiCr – NiAl		NiCr – NiAl		NiCr – CuNi		NiCrSi – NiSi		NiCrSi – NiSi		
Sheath	M2110		M0601		M0809		M0001		M0809		M0001		
	AISI – 310		Inconel 600		Hastelloy X		HR160		Hastelloy X		HR160		
Diameter	3	3.2 1/8"	4.5	4.8	6	6.35 1/4"	8	9.53 3/8"	12.7 1/2"	Other on request			
	Individual isolated (I)				Common isolated (CI)								
Hot junction	Hot junction electrically isolated from and shielded by the sheath				Multiple hot junctions joined to one hot junction electrically isolated from and shielded by the sheath								
	ANSI		IEC		DIN								
Colour Code	ANSI – MC96-1		IEC 584-1		DIN 43714								
	M00		M01		M02		M03		OPTIONS Overall stainless steel braiding				
PVC		Teflon®		Kapton®		Glass fiber							
polyvinyl		extruded FEP		polyimide tape		resin impregnation							
max. +105°C		max. +260°C		-80° +360°C		max. +480°C							
Transition	Stainless steel. Same diameter as Mi cable for OD >4.8 mm . Otherwise OD9.53 mm										Other on request		
	Standard potting compound: max. 120°C												

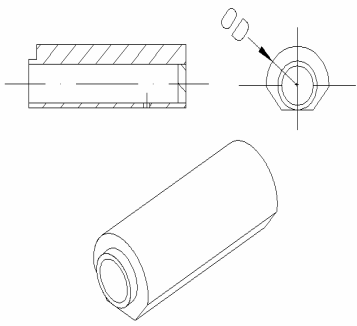Weld on type											
Specification							-standard length 40 mm -standard OD : 3 x thermocouple OD -Material : same as thermocouple -option : other dimensions				

TC model	TC type	(S) Single (D) Dual (T) Triple	Diameter	Sheath	Hot junction	Le	Colour code	Wire	AWG	E	N° and diameter coils	
K	GE53	TC WI	S	D6.0	M0809	I	275	ANSI	M02	24	800	3-100
	GE53	TC WI										

Options

Code	Description	
KK	Adjustable compression fitting	Please indicate process thread
PR	Protection sleeve	Refrex® 1200 Braiding sleeving Alumina-Boria-Silica fiber retains strength and flexibility at continuous temperature up to 1100°C Refrex® 1400 Braiding sleeving Alumina-Boria-Silica fiber retains strength and flexibility at continuous temperature up to 1371°C Other on request
WC#	Welding clip + number	Same material as thermocouple sheath
CON	STD	No connection head
	S10/S16-N110-E407	Alu head hinged / Alu screwed type with nipple union nipple
	S20/S26-N110-E407	Alu head hinged / Alu screwed type with nipple lock nut
	XXX	Other on request
CF	Adjustable compression fitting	Mounted in union / nipple
PSH	Pre shaping of thermocouple	Specify the requested form
	SDL / SDR	Side entry down left / down right
	SUL / SUR	Side entry up left / up right
	BDL / BDR	Bottom entry down left / down right
	TUL / TUR	Top entry up left / up right
HC	Heath shield	Standard material SS310 . Other on request

How to order							
Process connection	Protection sleeve	Welding clips an N°	Connection head	Compression fitting	Pre shape	Form	Heath shield
KK ¼"NPT	PR Refrax1200	WC-3	STD	CF	PSH	BDL	000