


Spring loaded resistance thermometer

FOR USE WITH THERMOWELLS

**S200-201-204-205-260-261-262-263
CONFIGURATIONS**


Ex ia RTD

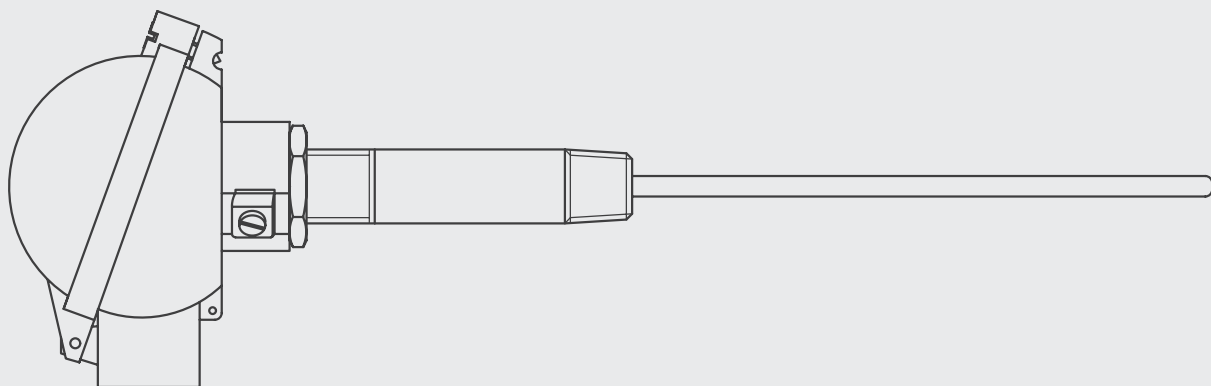


RODAX^o
new temperature solutions

Product series PT100RI/WI


S200

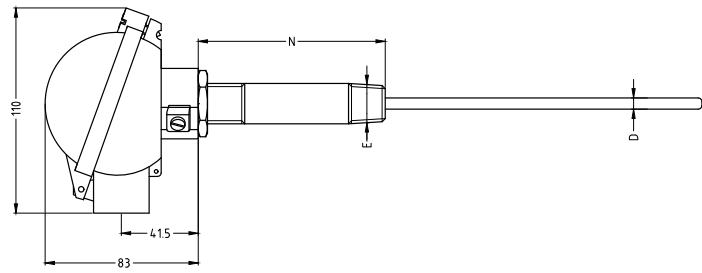


S201

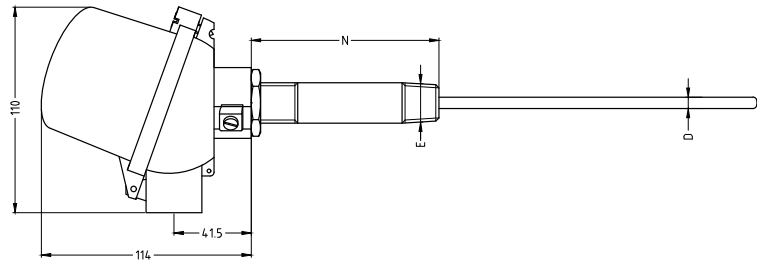


S204

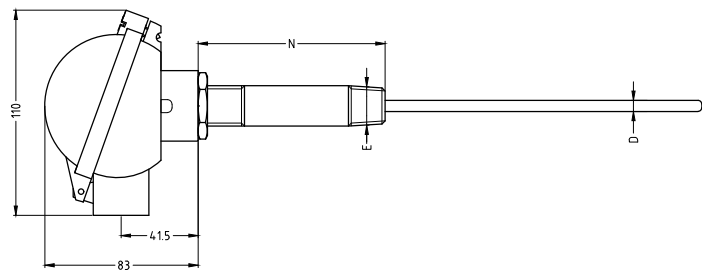


S205

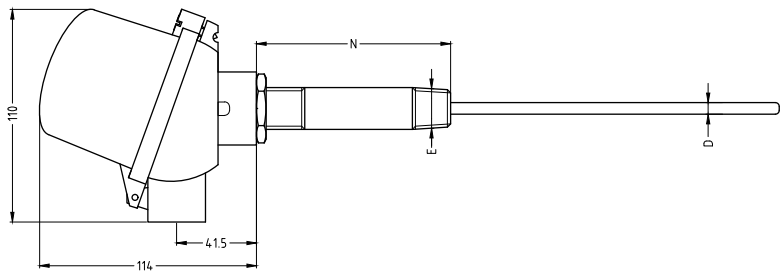

S260 & S261

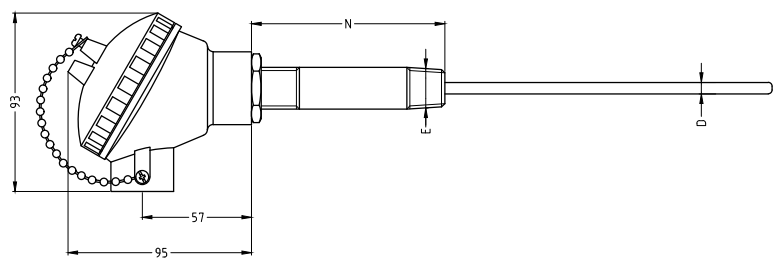

S262 & S263

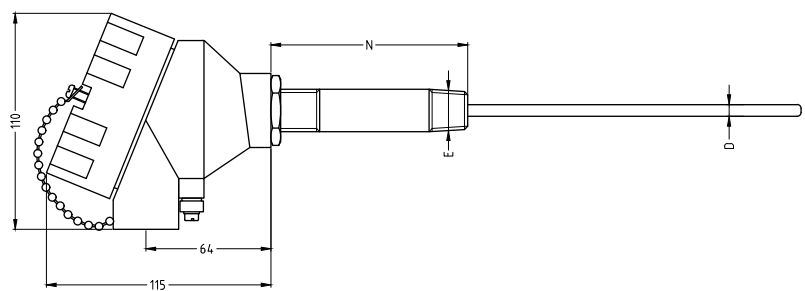

Features assembly

The industrial spring loaded configuration guarantees a positive contact between the sensing part of the temperature probe and the bottom of the thermowell, thus reducing the response time. In order to calculate the correct element length, we need the Z-length: this is the total bore depth of the thermowell.

The assemblies can be delivered with an aluminium or stainless steel connection head combined with a high quality thermocouple element with MgO mineral insulated metal sheathed cable, providing excellent stability and reproducibility.

Sensor diameters up to 12,7mm.

Technical specification assembly

- Connection head aluminium (S200-S201-S204-S205-S260-S262) or SS316 (S261-S263).
- Ambient temperature range assembly: -45/+80 °C; this can be limited depending on the materials applied or in case a temperature transmitter is used.
- IP-68 protection degree (body – cover) with silicone rubber O-ring. The assembly protection degree (IP-68) can be attained but depends on the use of correct cable gland(s) and on the correct mounting to thermowells.
- Cover: hinged type or screw type with chain.
- Several sensor diameters and lengths are possible.

Table 1: Configuration

Connection head type

Choice between:

- Connection head types S200 / S201 / S204 / S205 with hinged type cover with 1 or 2 conduit openings.
- Connection head types S260 / S261 / S262 / S263 with screw type cover with 1 or 2 conduit openings.
- Connection head supplied with O-ring in silicone rubber (between body and cover). Head supplied with external earth terminal.

| | Conduit | Material | Coating | Colour |
|-----------------|--------------------------|--------------------------------|--|----------------------------|
| S200 | 00C1 1x conduit | Aluminium | Epoxy Corrosion category EN ISO 12944-2: C4 | RAL5015 Sky blue |
| S201 | 01C1 1x conduit | Aluminium | Epoxy Corrosion category EN ISO 12944-2: C4 | RAL5015 Sky blue |
| S200/201 | 00C2/01C2 2x conduits | Aluminium | Epoxy Corrosion category EN ISO 12944-2: C4 | RAL5015 Sky blue |
| S204 | 04S1 1x conduit | Polyamide PA12 (Antistatic) | None | Black |
| S205 | 05S1 1x conduit | Polyamide PA12 (Antistatic) | None | Black |
| S260 | 60C1 1x conduit | Aluminium | Epoxy Corrosion category EN ISO 12944-2: C4 | RAL5015 Sky blue |
| S261 | 61S1 1x conduit | SS316 | None | SS316 natural colour |
| S262 | 62C2 2x conduits | Aluminium | Polyurethane spray on primer Corrosion category EN ISO 12944-2: C5-M | RAL5015 Sky blue |
| S263 | 63S2 2x conduits | SS316 | None | SS316 natural colour |

Table 2: Measuring inserts main models

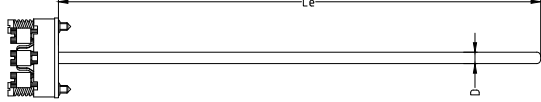
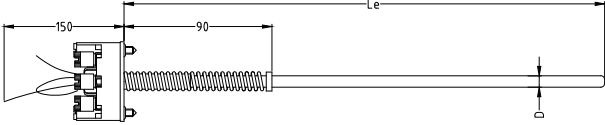
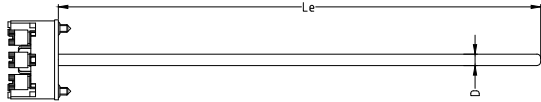
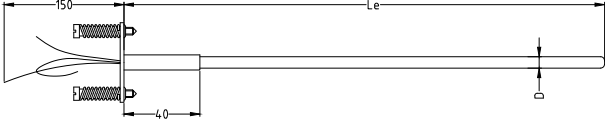
| | Terminal | Total spring | |
|------------|--|--|--|
| PCC | Ceramic spring loaded terminal block 2/3/4/6 or 8 terminals | 10 mm We recommend a spring loading of +/-5 mm |  |
| PCB | Hi-tech spring loaded thermoplast (moisture and shock proof) terminal block 2/3/4 or 6 terminals | 40 mm We recommend a spring loading of +/-20 mm |  |
| PCA | Hi-tech spring loaded thermoplast (moisture and shock proof) terminal block 2/3/4 or 6 terminals | 10 mm We recommend a spring loading of +/-5 mm |  |
| PFA | Spring loaded mounting plate with flying leads of 150 mm | 10 mm We recommend a spring loading of +/-5 mm |  |

Table 3: Equipment for potentially explosive atmospheres

Certification

| | |
|----------|--------|
| A | ATEX |
| I | IECEX |
| G | GOST-R |

Explosive atmosphere

| | |
|----------|------|
| G | Gas |
| D | Dust |
| | |

Table 4: Measuring inserts details

Details

- Maximum temperature: 550 °C
- Minimum insulation resistance: 1000 MOhm at 500VDC, $T_{amb}=20\text{ °C}$
- Conductors: material Cu
- Metal sheath: SS321 / 1.4541

PT100 element

| S | D | Option | HV |
|----------|----------|---------------|----------------|
| Single | Double | | High vibration |

Diameter ØD

| D3 | D3,2 | D4,5 | D4,8 | D6 | D6,35 | D8 | D9,53 | D12,7 | Other diameters on request |
|-----------|-------------|-------------|-------------|-----------|--------------|-----------|--------------|--------------|----------------------------|
| 3,0 mm | 3,2 mm | 4,5 mm | 4,8 mm | 6,0 mm | 6,35 mm | 8,0 mm | 9,53 mm | 12,7 mm | |

Electrical connection

| W2 | W3 | W4 (*) | (*) for OD 3 mm: dual sensors max 2x3 wire |
|-----------|-----------|---------------|---|
| 2 wire | 3 wire | 4 wire | |

Accuracy

| A1 | A3 | A5 | A6 | A10 | Other accuracies on request |
|--|------------------------|------------------------|------------------------|--------------------------|-----------------------------|
| Class A IEC EN 60751 $\pm(0.15+0.002 t)\text{°C}$ | 1/3 DIN 1/3 class B | 1/5 DIN 1/5 class B | 1/6 DIN 1/6 class B | 1/10 DIN 1/10 class B | |

Table 5: Extension details (E and N)

Details

Pipe Nipple + lock nut stainless steel SS316L. Size: 1/2" sched40. Standard length N=110 mm. Other lengths on request.

Extension connection (E)

| | | |
|-------------|-------------|------------------------------------|
| E405 | E406 | Other dimensions on request |
| 1/2"NPT | 3/4"NPT | |

Extension length (N)

| | | |
|------------|-------------|---------------------------------|
| N75 | N110 | Other lengths on request |
| 75 mm | 110 mm | |

Total bore depth thermowell

Definition total bore depth thermowell (Z) in mm below.

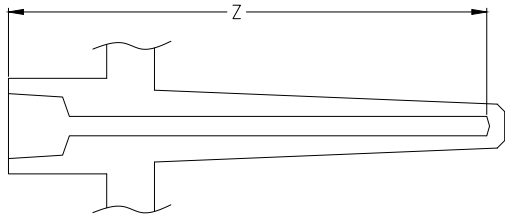
| | |
|--|---------------|
|  | Z..... |
| | mm |

Table 6: Connection head details

Connection head single/double conduits (SC/DC)

| | | | |
|--------------|--------------|--------------|--------------|
| SC173 | SC405 | DC173 | DC405 |
| 1X M20x1.5 | 1X 1/2"NPT | 2x M20x1.5 | 2X 1/2"NPT |

Table 7: Connection head accessories

Available options

- **Option 1: For SC and DC connection heads: Cable gland(s) only**

If required, a cable gland can be supplied; please use the letter 'CG' (cable gland) followed by the material of the cable gland and used cable diameter. Specification see below table.

The offered cable glands are II2 G Ex d/e IIC Gb and II 2D Ex tb IIIC Db IP66 certified and can be combined with configured products in this datasheet.

For SC heads, only option 'one cable gland' is possible. For DC heads, both one and two cable glands are possible.

- **Option 2: For DC connection heads: One conduit plugged**

Please use the letter 'P' (plug) followed by the material of the plug, see below table. The remaining conduits stay open.

- **Option 3: For DC connection heads: Cable gland + one conduit plugged**

Please use the combination 'PCG' (plug cable gland) followed by the material of the plug and cable gland, see below table.

| | | Option 1 | Option 2 | Option 3 |
|---------------------------------------|-----------------------|---------------------------------|---------------|---------------------------------|
| Material | Brass | CGM0200 | PM0200 | PCGM0200 |
| | Nickel plated brass | CGM0210 | PM0210 | PCGM0210 |
| | Stainless steel SS316 | CGM2107 | PM2107 | PCGM2107 |
| | Polyamide | CGM5006 | | CGM5006 |
| Cable diameter for EPDM rubber | 4 - 7 mm | D5 | | D5 |
| | 7 - 9,5 mm | D8 | | D8 |
| | 9 - 12 mm | D10 | | D10 |
| | 7 - 13 mm | D9 (only for CGM5006) | | D9 (only for CGM5006) |
| Glands N° | One cable gland | N1 | | |
| | Two cable glands | N2 | | |

Table 8: Certification possibilities

Certificates

Following tests and certificates are possible and are either done in-house or done by an external party.

| Code | Certificates |
|---------------|---|
| Q04210 | Functional test report sensor |
| Q04230 | Calibration report (measuring points to be indicated) E.g. 0/100 °C |
| Q05220 | Calibration report by accredited calibration lab retraceable (measuring points to be indicated) |
| Q05230 | Calibration report by accredited calibration lab ISO/IEC 17025 (BELAC) (measuring points to be indicated) |
| Q02040 | Test report EN10204-2.2 |
| Q04250 | Transmitter programming. Range and burn-out settings to be indicated |




Addenda

Thermal data related to product series PT100RI/WI

The maximum process temperature T_p (in °C) and the relation to the temperature class is as follows:

| | | | | | | | |
|--|----|-----|-----|-----|-----|-----|----------|
| Maximum process temperature T_p (°C) | 75 | 90 | 125 | 190 | 285 | 435 | >435 |
| Temperature class (°C) | T6 | T5 | T4 | T3 | T2 | T1 | T_p+10 |
| Maximum surface temperature T of the Assembly (°C) | 85 | 100 | 135 | 200 | 300 | 450 | T_p+10 |

Certificates for product series PT100RI/WI

| | | |
|------------------------|---|---|
| ATEX 2014/34/EU | ATEX EU-type examination certificate 18ATEX0060 X |  |
| IECEX 02 | IECEX DEK 18.0032 X |  |
| GOST-R | GOST EAC RU C-BE.ГБ05B.00211 |  |

HOW TO ORDER (example)

| Code | | Example | Your code |
|------------------------------------|-------------|-------------|-----------|
| Configuration | See table 1 | S201 | |
| Main model | See table 2 | PCA | |
| Certification | See table 3 | A | |
| Explosion atmosphere | See table 3 | G | |
| Pt100 element | See table 4 | S | |
| Diameter ØD | See table 4 | D6 | |
| Electrical connection | See table 4 | W3 | |
| Accuracy | See table 4 | A1 | |
| Extension connection | See table 5 | E405 | |
| Extension length | See table 5 | N110 | |
| Total bore depth thermowell | See table 5 | Z1000 | |
| Connection head SC/DC | See table 6 | DC173 | |
| Connection head accessories | See table 7 | CGM0200D5N1 | |

Ordering code example:

S201 PCA A G S D6 W3 A1 E405 N110 Z1000 SC173 CGM0200D5N1

For all options: please contact Rodax

© 2018

Santvoortbeeklaan 33, 2100 Antwerp - Belgium

T +32 (0)3 360 90 00

E quotationdesk@rodax-europe.com

www.rodax-europe.com

RODAX[°]
new temperature solutions

S200-Exia-RTD GB 201810